


COMPACT EVO 246HF

FEATURES

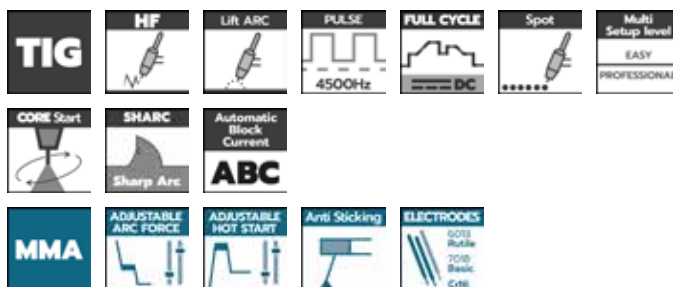

TECHNICAL DATA

Input Voltage	
Power 60%	
U _o	
Amp. min-max	
Duty Cycle 40°C	
Insulation	
Protection degree	
Dimens. (LxWxH)	
Weight box/net	

COMPACT EVO 246HF		
(1ph) · 230V ± 10% · 50/60 Hz		
	TIG	MMA
	6,8 KVA	6,6 KVA
	65 V	65 V
	5 ÷ 250 A	20 ÷ 200 A
	250A @ 25% 160A @ 60% 125A @ 100%	200A @ 35% 150A @ 60% 120A @ 100%
	H	
	IP 22S	
	195x440x395 mm	
	14,6 / 13,6 Kg	

STANDARD CONFIGURATION

Part number	Description
99805990A	COMPACT EVO 246HF · Air

Part number	Description	
99805990KA	COMPACT EVO 246HF · H ₂ O	
99805990A	Power source	INCLUDED
99490021KIA	Cooler unit SMART 230V 246HF + tank CL 500 · 5 kg	
99900171A	Trolley · 2 wheels + shelves ECO	