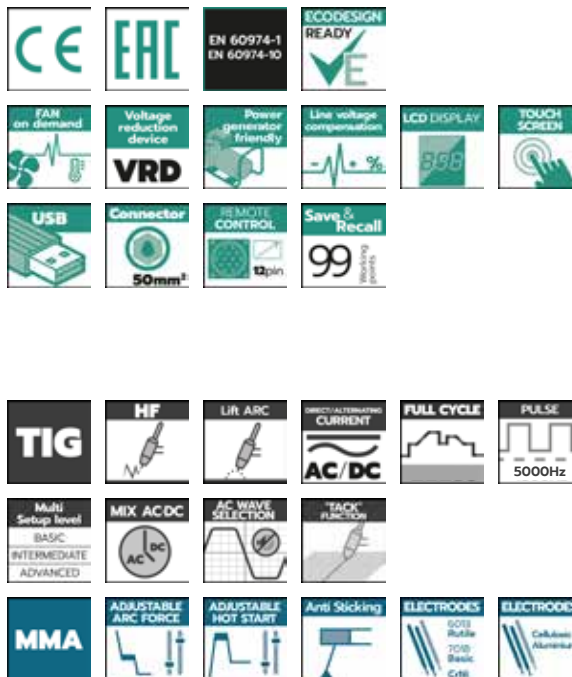


COMPACT EVO 410 AC/DC

FEATURES

TECHNICAL DATA

Input Voltage	
Power 60%	
U _o	
Amp. min-max	
Duty Cycle 40°C	
Insulation	
Protection degree	
Dimens. (LxWxH)	
Weight box/net	

COMPACT EVO 410 AC/DC

(3ph) · 400V ± 10% · 50/60 Hz		
	TIG	MMA
	17,5 KVA	17,5 KVA
	63 V	63 V
	5 ÷ 400 A	5 ÷ 400 A
	400A @ 45% 360A @ 60% 320A @ 100%	400A @ 45% 360A @ 60% 300A @ 100%
	H	
	IP 22S	
	320x640x520 mm	
	48,4 / 51,4 Kg	

STANDARD CONFIGURATION

Part number	Description	
99815047KA	COMPACT EVO 410 AC/DC	
99815047A	Power source	INCLUDED
99490024KA	Cooler Unit XL + tank CL 500 · 5 kg	
99900187	Trolley · 4 wheels ECO	