


FOX 211



FEATURES

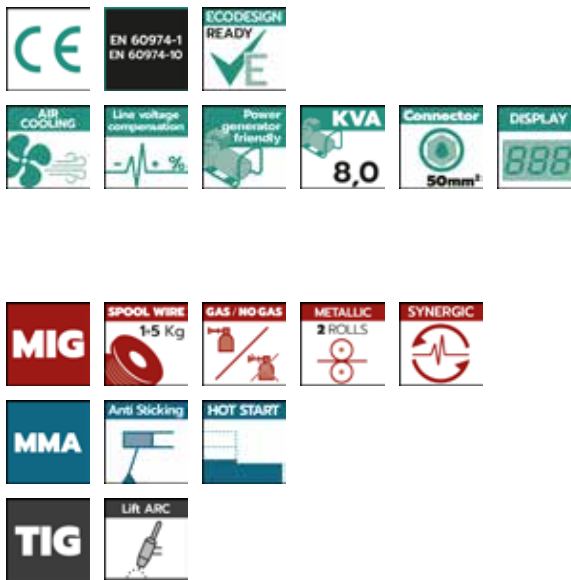

TECHNICAL DATA

Input Voltage	
Power 60%	
U_o	
Amp. min-max	
Duty Cycle 40°C	
Steel	
Stainless steel	
Aluminium	
Flux Core	
CuSi ₃	
Ø Electrode	
Electrode type	
Insulation	
Protection degree	
Dimens. (LxWxH)	
Box (LxWxH)	
Weight box/net	

FOX 211

	(1ph) 230V ± 10% · 50/60Hz		
	5,5 KVA		
	MIG	MMA	TIG
	35 V	65 V	65 V
	20 ÷ 200 A	5 ÷ 200 A	5 ÷ 200 A
	200A @ 35% 160A @ 60% 140A @ 100%	200A @ 35% 150A @ 60% 120A @ 100%	200A @ 35% 150A @ 60% 120A @ 100%
	0,6 ÷ 1,0 Ø mm	-	-
	0,8 Ø mm	-	-
	0,8 ÷ 1,0 Ø mm	-	-
	0,9 Ø mm	-	-
	0,8 Ø mm	-	-
	-	1,6 ÷ 5,0 Ø mm	-
	-	6013 - 7018 - CrNi	-
		H	
		IP22S	
		220x520x385 mm	
		260x640x435 mm	
		23 / 19 Kg	

STANDARD CONFIGURATION

Part number	Description	
99820053A	FOX 211	
23000494	MIG torch ErgoPlus 25 · Euro connection · 3,0 m	INCLUDED
43210132	Ground cable · 25mm ² · 3,0 m	
30900030	Gas hose KIT · 2,0 m	
33805101	Drive roll · Ø 30 mm · 0,8 ÷ 1,0 mm	

OPTIONAL

Part number	Description
99900171A	Trolley
43205049K	MMA welding cable · 16mm ² · 3,0 m
23020199	TIG torch Tig 26V · with gas valve · conn. 50mm ² · 4,0 m · KIT consumables · Ø 2,4 mm