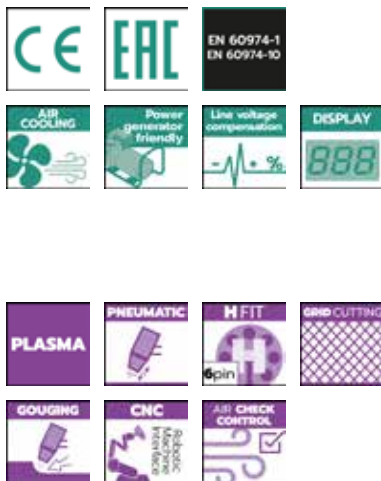


PC EVO 50.3

FEATURES

TECHNICAL DATA

Input Voltage
Power 60%
Max input current
U _o
Amp. min-max
Duty Cycle 40°C
Clean cut 25 cm/min
Max cut
Severance
Pierce
Required air capacity
Insulation
Protection degree
Dimens. (LxWxH)
Weight box/net

PC EVO 50.3

(3ph) 400V ± 10% · 50/60Hz
7 KVA
14 A
240 V
20 ÷ 45 A
45A @ 50% 35A @ 100%
15 mm
20 mm
22 mm
12 mm
220 l/min @ 5 bar
H
IP 22S
195x495x395 mm
20,1 / 19,1 kg

STANDARD CONFIGURATION

Part number	Description	
99835044K	PC EVO 50.3 + EP 105	
99835040A	Power source · Ground cable · 10 mm ² · 4 mt	*(no consumables)
23010162	Plasma torch EP 105 · 6 mt · 6 Pins · H.FIT	
23015563BH	Starter KIT EP 105 · 20-70 A	
		INCLUDED