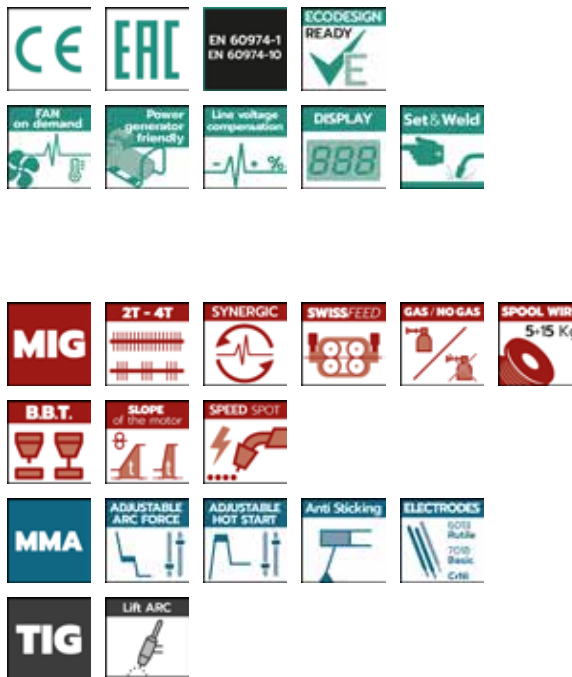


UNITECH EVO 418 · H₂O

FEATURES

TECHNICAL DATA

Input Voltage	
Power 60%	
U _o	
Amp. min-max	
Duty Cycle 40°C	
Insulation	
Protection degree	
Dimens. (LxWxH)	
Weight box/net	

UNITECH EVO 418 · H₂O

(3ph) 400V ± 10% · 50/60Hz		
MIG	MMA	TIG
14,9 KVA	12,5 KVA	9,8 KVA
45 V	60 V	12 V
30 ÷ 400A	20 ÷ 350 A	10 ÷ 350 A
400A @ 60% 310A @ 100%	350A @ 60% 310A @ 100%	350A @ 60% 310A @ 100%
H		
IP 23S		
	Power source	250x610x440 mm
	Wire feeder	240x560x460 mm
	Lifter	250x600x230 mm
	Trolley	460x1000x800 mm
		86,0 / 80,0 kg

STANDARD CONFIGURATION

Part number	Description	
99855013KA	UNITECH EVO 418 + X4 SYNERGIC · H ₂ O	
99850009A	Power source	INCLUDED
99420079A	Wire feeder X4 · H ₂ O	
99900286	Wheels KIT X4 / H4 / XP4	
99490030KA	Cooler unit SMART XL + tank CL 500 · 5 kg	
44890386A	Interconnection cable · 70 mm ² · 5 mt · H ₂ O	
33805140	Pressure roll · Ø 37 mm · 1,0 - 1,2 mm · x2 · (red/orange) ●●	
33805145	Drive roll · Ø 37 mm · 1,0 - 1,2 mm · x2 · (red/orange) ●●	
99900282	Trolley · 4 wheels UNI	