


SPARC 160



FEATURES

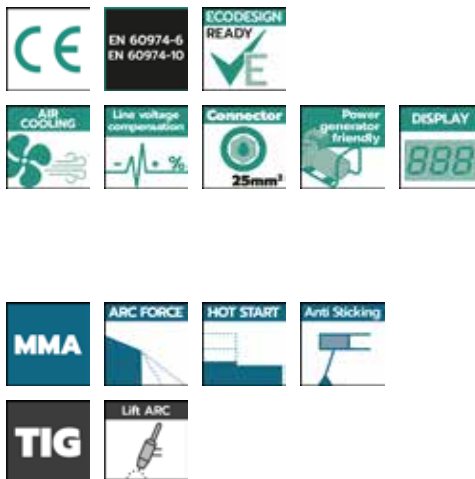

TECHNICAL DATA

Input Voltage
Power 60%
U _o
Amp. min-max
Duty Cycle 40°C
Ø Electrode
Electrode Type
Insulation
Protection degree
Dimens. (LxWxH)
Weight box/net

SPARC 160

(1ph) 230V ± 10% • 50/60Hz
6,4 KVA
70 V
10 ÷ 160 A
160A @ 25%
105A @ 60%
80A @ 100%
1,6 ÷ 4,0 mm
6013 - 7018
H
IP22S
120 x 300 x 260 mm
4,2 Kg

STANDARD CONFIGURATION

Part number	Description	
99806022	SPARC 160 · CARTON BOX KIT	230 x 360 x 280 mm · 7,0 Kg
-	Power source · Sparc 160	INCLUDED
43210256	Ground cable with clamp · 16 mm² · 2,0 m · connector 25 mm²	
43205128	Welding cable · 16 mm² · 3,0 m · connector 25 mm²	
21905039	Hammer-brush	
77005237	Carton box	

99806025	SPARC 160 · ANTI-SHOCK CASE KIT	160 x 400 x 475 mm · 8,6 Kg
-	Power source · Sparc 160	INCLUDED
43210256	Ground cable with clamp · 16 mm² · 2,0 m · connector 25 mm²	
43205128	Welding cable · 16 mm² · 3,0 m · connector 25 mm²	
21905039	Hammer-brush	
21690996	Anti-shock case	