

LASSCHERM SPRINT**COMPOSITION**

- For steel basic welding screen:
- Carbon steel tubes, profiles, powder coated or zinc
- Contain no toxic parts.
- Contain no inflammable parts.
- Contain no electrical parts.

**USE AND HANDLING**

Coating will be damaged by open fire or intensive heat. There is a possibility that the screen is unstable by rough, unequal floor conditions.

Oil or grease pollution do not have negative effects on the screens condition

MAINTENANCE AND SAFETY

- Bolts must be periodic checked at free assembly.
- Beams are only applicable for use of curtains or sheets, not for heavy weight products which overload the beam.
- It is not recommended for hoisting operations

FEATURES

Made from solid welded carbon steel tubes and profiles. Screen is free moveable in any direction. Screen will be supplied in loose parts, packed in a solid box, and must be fixed with included metric fasteners by basic tools.

DESIGN

Distance between floor level and upper beam is 194 cms, total width 198 cms.

To obtain a stable construction, both foot profiles do have a length of 60 cms

TECHNICAL SPECIFICATION

Type of welding screen: solid, moveable screen

Total weight, basic screen: 12 kgs.

Maximum static load beam: 60 N

Maximum dynamic peak load beam: 100 N

Range: free moveable in any direction

Overall size height: 1940 mm

Functional width: 1980 mm

Fasteners: Metric

Castor Operation: by hand


Coating: poles and foot profiles powder coated in red RAL3020

Materials: steel tube and profiles


Application: for internal use

LASSCHERM SPRINT

DIMENSIONS SPRINT WELDING SCREEN

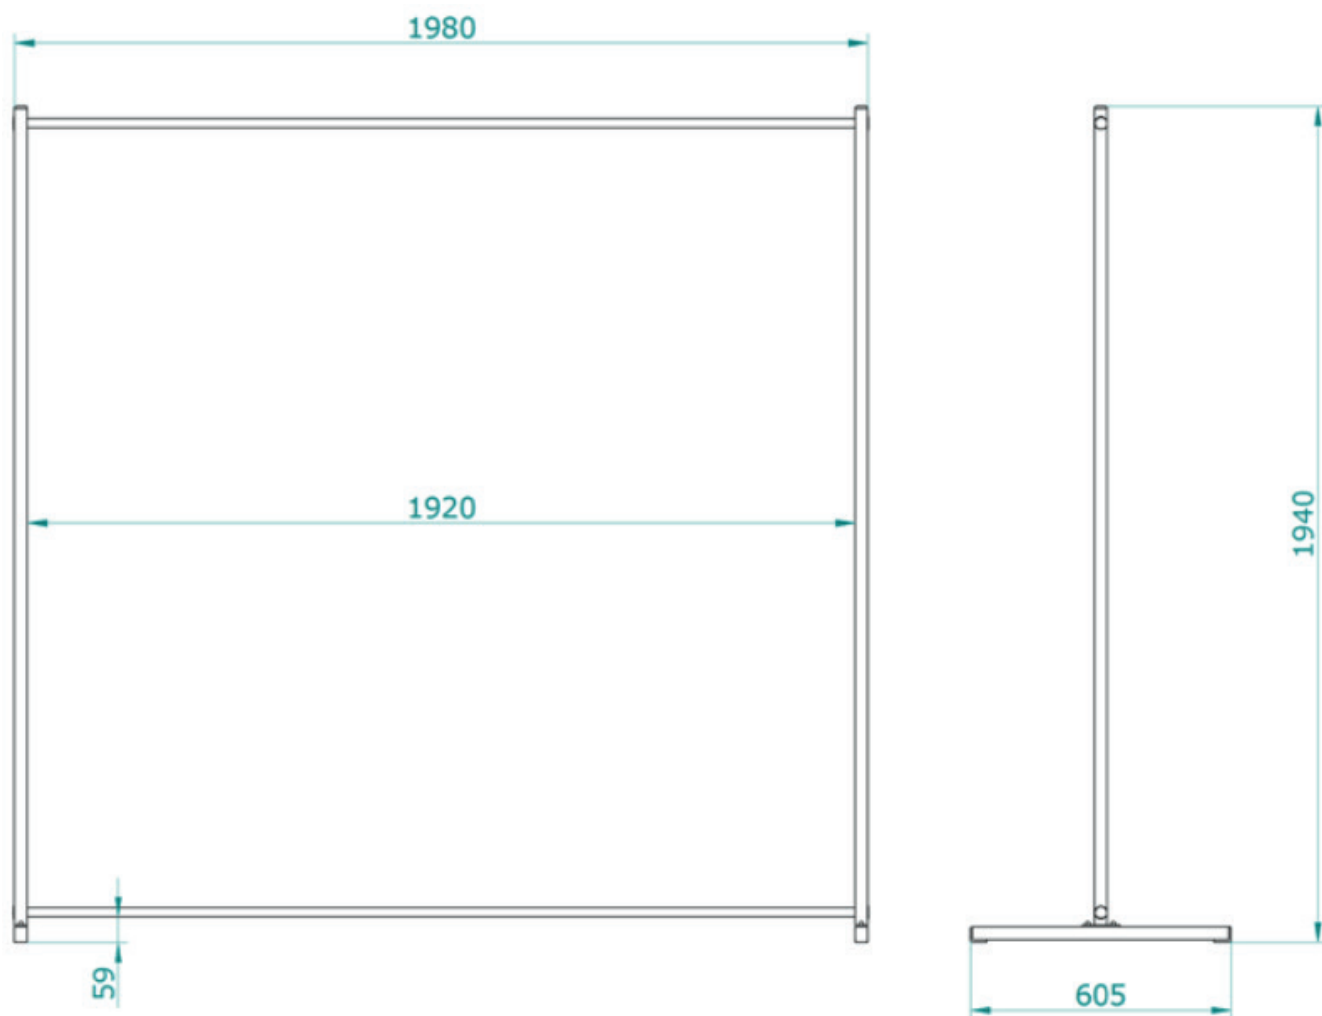



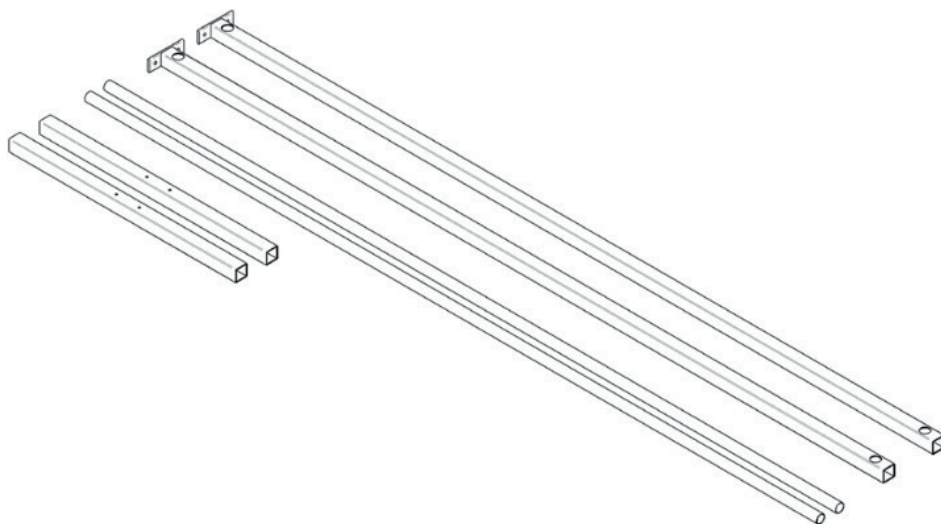




PART LIST - BASIC PARTS SPRINT WELDING SCREEN



99.36.24.0003

LASSCHERM SPRINT

PART LIST ACCESSOIRES OMNIUM SPRINT SCREEN

| M6x12 | M8x50 | Ø18x6,5 | M8 | Ø25 | 30x30 | 30x30 |
|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |
| 4x | 4x | 4x | 4x | 4x | 2x | 4x |

MOUNTING INSTRUCTION SPRINT WELDING SCREEN

