


CS-R1 Pendulum Weaving Welder

- It is a butt & fillet welder for circumference, and the column & boom, and the rotator are needed additionally.
- It makes pendulum movement, and the leg length of high quality as much as you want can be acquired.
- It drives at a constant speed with the minimized gear backlash. Thus the high welding quality and the long life span of the welder is acquired.

DIVISION		CS-R1 WEAVER		Remark
Genral	AC Input power	AC100V~240V 50/60Hz		
	DC Input power(Option)	AC 48V	DC 18-72V(Option)	
	Dimensions	328(W) X 213(L) X232(H)		
	Weight	3.4Kg		
Torch	Left / Right Distance	0~120mm		
	Up / Down Distanc	0~70mm		
	Running Angle	±5 °		
Weaver	Weaving Motor	DC24V, 12W, 5000 RPM		BLDC MOTOR
	Readucer	1000 : 1		
	Weaving Width	± 16°		
	Weaving Speed	0~5rpm / min		
	Left / Right Stop	0.0~9.9(sec)		
	Center Shit	0° ~360°		

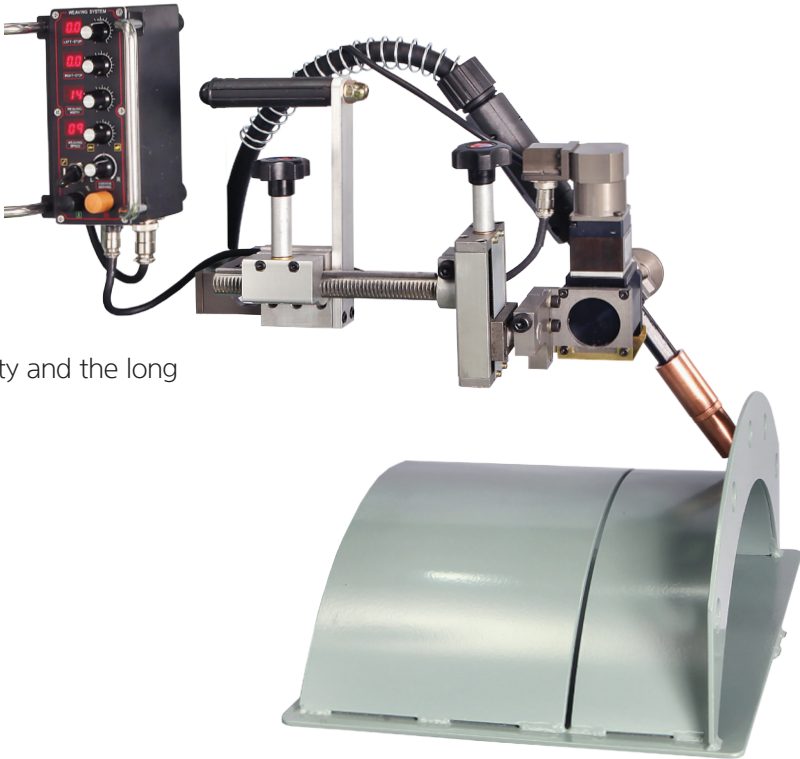

Welding Position	Fillet	Groove	PIPE 1GR

